



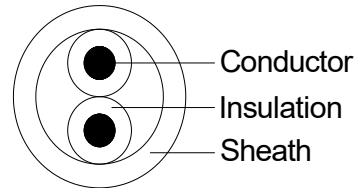

C6110069133

(SP-8461)

TWISTED SPEAKER CABLE

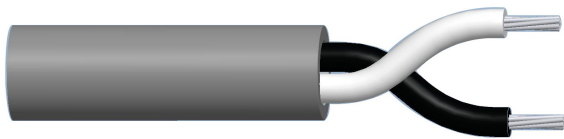

DESCRIPTION

18AWG., 0.85mmsq. Stranded TACW, Twisted Pair, PVC Insulation, PVC Sheath.

APPLICATION

For the connecting wiring between the amplifier & speaker.

APPLICABLE STANDARD

- RoHS 2011/65/EU Directive.
- Equivalent to Belden 8461

CONSTRUCTION

Conductor

Material :	Tinned Annealed Copper Wire
Size :	0.85mmsq. (18AWG)
Construction :	Stranded (7/0.4mm)

Insulation

Material :	PVC
Nominal O.D :	2.3mm
Color :	Black, White

All values subject to factory tolerances.

Samson tries to ensure accuracy at the time of issue and reserves the right to change the data of the products without notice.

Copyright © 2013 Samson Electric Wire Co., Ltd. All Rights Reserved.

Establish : LLS | Approved : LQM | Issue : 01 | Date : 20-05-2015 | Page 1 of 2



C6110069133

(SP-8461)

TWISTED SPEAKER CABLE

Sheath

Material :	PVC
Nominal O.D :	6.0mm
Color :	Grey

PHYSICAL PROPERTIES

Operating Temperature (Flexing)	-15°C to 90°C
Operating Temperature (Fixed)	-30°C to 90°C
Min. Bend Radius (Fixed)	60mm
Flame Test	VW-1

ELECTRICAL PROPERTIES

Rated Voltage	300V
Max. Suggest Current	5A
Max. DCR @20°C	21.3Ω/km
Nom. Capacitance	79.9pF/m
Voltage test : Core to Core	2kV a.c/1min

All values subject to factory tolerances.

Samson tries to ensure accuracy at the time of issue and reserves the right to change the data of the products without notice.

Copyright © 2013 Samson Electric Wire Co., Ltd. All Rights Reserved.

Establish : LLS | Approved : LQM | Issue : 01 | Date : 20-05-2015 | Page 2 of 2