



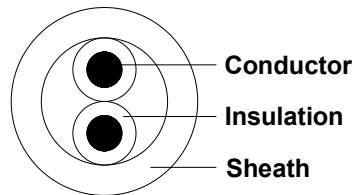

C6110072133
TWISTED SPEAKER CABLE

(SP8477-1P)



DESCRIPTION

12AWG., 3.2mmsq. Stranded TACW, Twisted Pair, PVC Insulation, PVC Sheath.

APPLICATION

For the connecting wiring between the amplifier & speaker.

APPLICABLE STANDARD

- EU RoHS Complies 2011/65/EU
- UL 758 AWM 1569 (Insulation)
- UL 758 AWM 20276 (Overall)

CONSTRUCTION

Conductor

Material :	Tinned Annealed Copper Wire
Size :	3.2mmsq. (12AWG)
Construction :	Stranded (65/0.25mm)

Insulation

Material :	PVC
Nominal O.D :	3.95mm
Color :	Black, White

All values subject to factory tolerances.

Samson tries to ensure accuracy at the time of issue and reserves the right to change the data of the products without notice.

Copyright © 2013 Samson Electric Wire Co., Ltd. All Rights Reserved.

Establish : LLS | Approved : LQM | Issue : 02 | Date : 25-05-2016 | Page 1 of 2





C6110072133
TWISTED SPEAKER CABLE

(SP8477-1P)

Sheath

Material :	PVC
Nominal O.D :	9.8mm
Color :	Grey

PHYSICAL PROPERTIES

Operating Temperature (Flexing)	-15°C to 60°C
Operating Temperature (Fixed)	-30°C to 60°C
Min. Bend Radius (Fixed)	98mm
Flame Test	UL 1581 VW-1
Sheath Printing	SAMSON SP8477-1P 12AWG x 1PAIR TWISTED SPEAKER CABLE – E104496  AWM 20276 60°C 30V VW-1 -  AWM I/II A/B 60°C 30V FT1 - Meter Mark - #Batch

ELECTRICAL PROPERTIES

Voltage Rating	30V (UL AWM 20276)
Max. Suggest Current	19A
Max. Conductor DC Resistance @ 20°C	6.4Ω/km
Voltage test : Core to Core	1kV a.c/1min

All values subject to factory tolerances.

Samson tries to ensure accuracy at the time of issue and reserves the right to change the data of the products without notice.

Copyright © 2013 Samson Electric Wire Co., Ltd. All Rights Reserved.

Establish : LLS | Approved : LQM | Issue : 02 | Date : 25-05-2016 | Page 2 of 2