
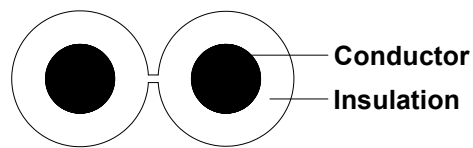


C61200181FF

(SP-CR40)

PARALLEL TYPE SPEAKER CABLE

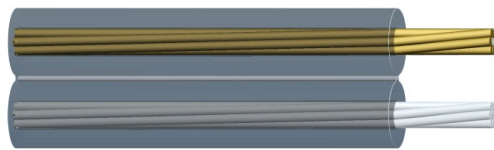

DESCRIPTION

20AWG., 0.5mmsq. Stranded PACW & TACW, Parallel Construction, PVC Insulation (Transparent).

APPLICATION

For the connecting wiring between the amplifier & speaker.

APPLICABLE STANDARD

- RoHS 2011/65/EU Directive.

CONSTRUCTION

Conductor

| | | |
|----------------|----------------------------|-----------------------------|
| Material : | Plain Annealed Copper Wire | Tinned Annealed Copper Wire |
| Size : | 0.5mmsq. (20AWG) | 0.5mmsq. (20AWG) |
| Construction : | Stranded (40/0.12mm) | Stranded (40/0.12mm) |

Insulation

| | |
|---------------|-------------|
| Material : | PVC |
| Nominal O.D : | 2.8 x 5.6mm |
| Color : | Transparent |

All values subject to factory tolerances.

Samson tries to ensure accuracy at the time of issue and reserves the right to change the data of the products without notice.

Copyright © 2013 Samson Electric Wire Co., Ltd. All Rights Reserved.

Establish : YDM | Approved : LQM | Issue : 02 | Date : 27-07-2015 | Page 1 of 2



C61200181FF

(SP-CR40)

PARALLEL TYPE SPEAKER CABLE

PHYSICAL PROPERTIES

| | |
|---------------------------------|---------------|
| Operating Temperature (Flexing) | -15°C to 70°C |
| Operating Temperature (Fixed) | -30°C to 70°C |
| Min. Bend Radius (Fixed) | 28mm |

ELECTRICAL PROPERTIES

| | |
|------------------------------|----------|
| Rated Voltage | 300V |
| Max. Suggest Current | 3A |
| Max. Bare Copper DCR @20°C | 39.7Ω/km |
| Max. Tinned Copper DCR @20°C | 41.8Ω/km |
| Spark Test | 3kV |

All values subject to factory tolerances.

Samson tries to ensure accuracy at the time of issue and reserves the right to change the data of the products without notice.

Copyright © 2013 Samson Electric Wire Co., Ltd. All Rights Reserved.

Establish : YDM | Approved : LQM | Issue : 02 | Date : 27-07-2015 | Page 2 of 2