


C6120020141

(SP-RB3012)

## PARALLEL TYPE SPEAKER CABLE

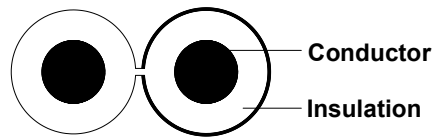

### DESCRIPTION

22AWG., 0.34mmsq. Stranded PACW, Parallel Construction, PVC Insulation.

### APPLICATION

For the connecting wiring between the amplifier & speaker.

### APPLICABLE STANDARD

- RoHS 2011/65/EU Directive.

### CONSTRUCTION

#### Conductor

Material :	Plain Annealed Copper Wire
Size :	0.34mmsq. (22AWG)
Construction :	Stranded (30/0.12mm)

#### Insulation

Material :	PVC
Nominal O.D :	2.6 x 5.2mm
Color :	Red/Black Stripe

All values subject to factory tolerances.

Samson tries to ensure accuracy at the time of issue and reserves the right to change the data of the products without notice.

Copyright © 2013 Samson Electric Wire Co., Ltd. All Rights Reserved.

Establish : LLS | Approved : LQM | Issue : 02 | Date : 08-12-2015 | Page 1 of 2



C6120020141

(SP-RB3012)

## **PARALLEL TYPE SPEAKER CABLE**

### **PHYSICAL PROPERTIES**

Operating Temperature (Flexing)	-15°C to 70°C
Operating Temperature (Fixed)	-30°C to 70°C
Min. Bend Radius (Fixed)	26mm

### **ELECTRICAL PROPERTIES**

Rated Voltage	300V
Max. Suggest Current	2A
Max. DCR @20°C	52.9Ω/km
Spark Test	3kV

All values subject to factory tolerances.

Samson tries to ensure accuracy at the time of issue and reserves the right to change the data of the products without notice.

Copyright © 2013 Samson Electric Wire Co., Ltd. All Rights Reserved.

Establish : LLS | Approved : LQM | Issue : 02 | Date : 08-12-2015 | Page 2 of 2